


Item description/product images

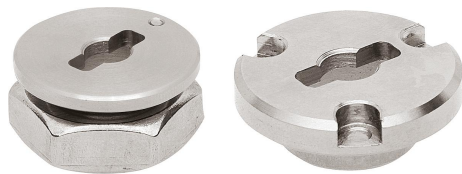

Description

Material:

Housing steel or stainless steel.
Nut stainless steel.

Version:

Housing nickel-plated or bright.
Nut bright.

Note:

M2 or M3 mounting screws are supplied.
Form A mounting option for plate thickness 6 to 10 mm.
Form B mounting option for plate thickness over 10 mm.

Accessory:

Quarter-turn clamp lock 05591 or 05591-05.

Drawing reference:

- 1) plate
- 2) quarter-turn clamp lock
- 3) locating pin
- 4) nut

Order No.	Form	Version 2	Main material	D	D1	D2	D4	A	M	H2	SW	H	H1	D3 for screw to DIN 912	D5	D6	L	L1
05592-50	A	superimposed	steel	5	-	25	-	10,5	M14X1,5	8	22	16	-	-	15	25	3,5	-
05592-80	A	superimposed	steel	8	-	32	-	13	M20X1,5	10	30	18	-	-	21	32	3,5	-
05592-150	A	superimposed	stainless steel	5	-	25	-	10,5	M14X1,5	8	22	16	-	-	15	25	3,5	-
05592-180	A	superimposed	stainless steel	8	-	32	-	13	M20X1,5	10	30	18	-	-	21	32	3,5	-
05592-501	B	countersunk	steel	5	14	25	21	-	-	-	-	9	4,5	M2	14	26	5	4
05592-801	B	countersunk	steel	8	20	32	26	-	-	-	-	11	5,5	M3	20	33	6	5
05592-1501	B	countersunk	stainless steel	5	14	25	21	-	-	-	-	9	4,5	M2	14	26	5	4
05592-1801	B	countersunk	stainless steel	8	20	32	26	-	-	-	-	11	5,5	M3	20	33	6	5

