

## Item description/product images

**Description****Material:**

Plates aluminium.  
Rollers ball-bearing steel.  
Sealings NBR.

**Version:**

Plates bright and anodised.

**Note:**

Roller carriage for straight and curved linear guide rails.

Also suitable for the system:

Straight linear guide rails 21355.  
Curved linear guide rails 21356.

The roller guide carriage 21351-2120 can be used from a curve radius of 400 mm, the roller guide carriage 21351-3150 from a curve radius of 500 mm.


**Technical data:**

Max. acceleration: 50 m/s<sup>2</sup>.  
Max. traversing speed: 5 m/s.

**Temperature range:**

-10°C to +70°C.

Drawings

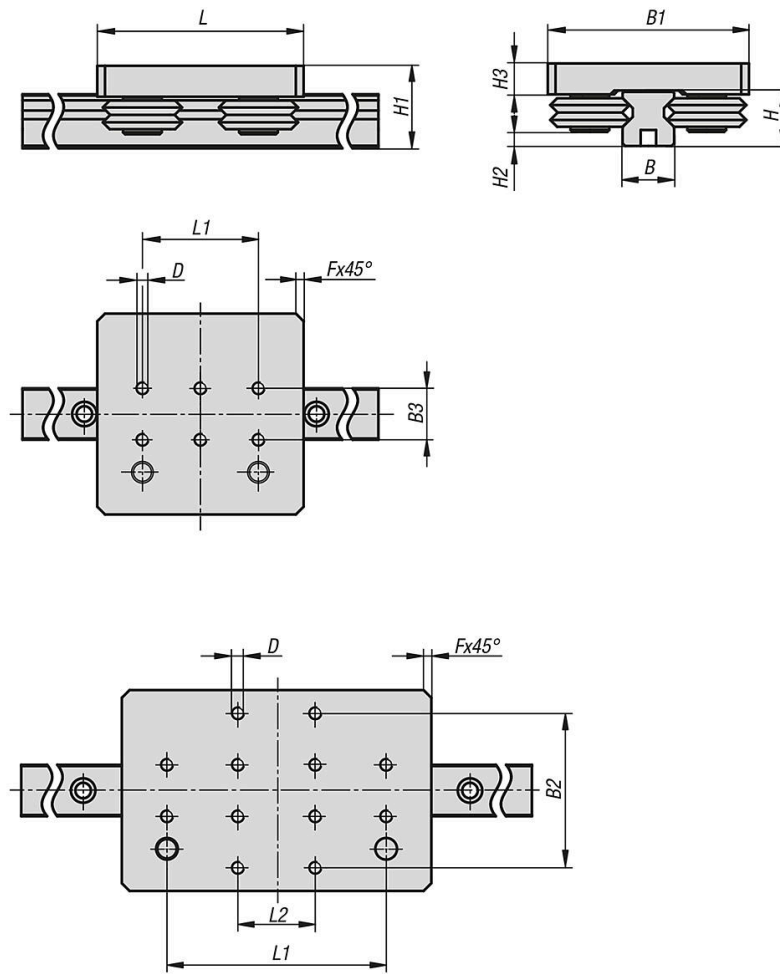

Overview of items

Order No.	Size	Form definition	B	B1	B2	B3	D	H	H1	H2	H3	L	L1	L2	F x 45°
21351-2080	2	short	20	78	-	20	M5	21	32	5,4	12	80	45	-	3
21351-2120	2	long	20	78	60	20	M5	21	32	5,4	12	120	85	30	3
21351-3110	3	short	28	112	-	28	M8	28	43	6,4	16	110	60	-	6
21351-3150	3	long	28	112	84	28	M8	28	43	6,4	16	150	100	35	6