

## Item description/product images



## Description

**Material, version:**

Form F tool steel, hardened, black oxide.

**Note:**

Grippers and inserts are ideal for use in clamping arms, gripping systems, clamping fixtures, clamping jaws and self-aligning pads. The use of grippers allows the transfer of very high torque values and above average grip, even with hard materials and surface irregularities.

Form O: The abrasive diamond surface is bonded firmly to the base. It is ideally suited to supporting smooth or slippery applications with a minimum of clamping pressure. This allows the diamond particles to get a firm grip on a very small area with minimum damage to the surface.

The diamond surface offers excellent wear resistance.

Form P: The polyurethane surface is vulcanised firmly to the ball. It is abrasion-resistant and does not discolour. It offers optimum protection against damage to delicate surfaces. The pearl-like surface gives a firm grip and allows air to escape so as to prevent any suction effect between the contact surface and the self-aligning pads.

Grippers and inserts can be fitted in the following self-aligning pads:


Order No. 02003-117X022 up to 02003-936X036

Order No. 02007-110X015 up to 02007-924X100

Order No. 02007-120X030 up to 02007-924X080

## Drawings

Form F  
diamond grip insert

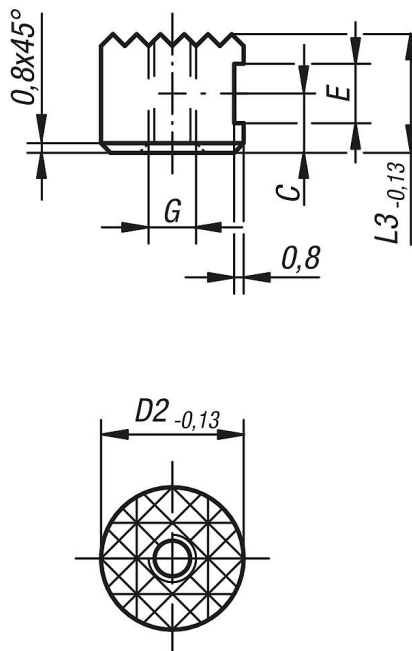

## Overview of items

| Order No.  | G  | D2 | L3 | Form | C   | E    |
|------------|----|----|----|------|-----|------|
| 07113-1010 | M5 | 10 | 10 | F    | 4,5 | 4,75 |

## Overview of items

| Order No.  | G  | D2 | L3 | Form | C   | E    |
|------------|----|----|----|------|-----|------|
| 07113-1012 | M5 | 10 | 12 | F    | 6   | 4,75 |
| 07113-1210 | M5 | 12 | 10 | F    | 4,5 | 4,75 |
| 07113-1212 | M5 | 12 | 12 | F    | 6   | 4,75 |
| 07113-1610 | M6 | 16 | 10 | F    | 4,5 | 4,75 |
| 07113-1612 | M6 | 16 | 12 | F    | 6   | 4,75 |
| 07113-2010 | M6 | 20 | 10 | F    | 4,5 | 4,75 |
| 07113-2012 | M6 | 20 | 12 | F    | 6   | 4,75 |
| 07113-2510 | M6 | 25 | 10 | F    | 4,5 | 4,75 |
| 07113-2512 | M6 | 25 | 12 | F    | 6   | 4,75 |