


Item description/product images

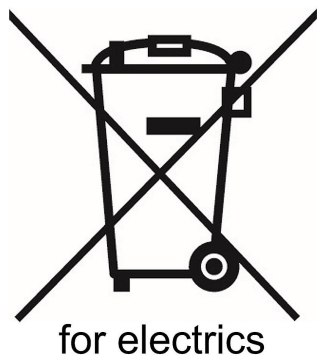

Description

Material:

Connector zinc.
Cable sheath PVC.


Note:

The M23x1 connector socket with screw lock can be used as a power supply cable for the actuators 85000-50.

Accessory:

Stainless steel or aluminium actuator for linear actuators 85000-50.

Drawings

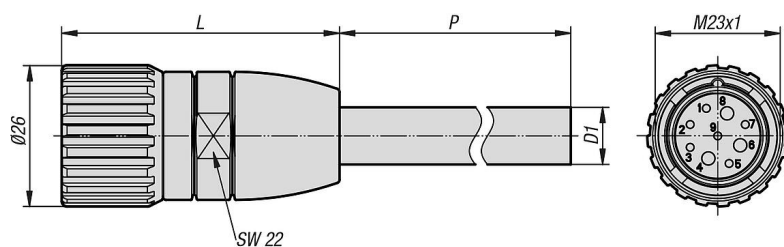

Overview of items

Order No.	D1	L	N	P	Safety rating	Operating voltage V	Cable bend radius moving	Cable bend radius fixed	EMC capability	Halogen-free
80150-30-2309X3000	8,8	51	3x1,5 mm ²	3000	IP67	150	≥ 10 x D1	≥ 5 x D1	shielded	yes
80150-30-2309X5000	8,8	51	3x1,5 mm ²	5000	IP67	150	≥ 10 x D1	≥ 5 x D1	shielded	yes
80150-30-2309X10000	8,8	51	3x1,5 mm ²	10000	IP67	150	≥ 10 x D1	≥ 5 x D1	shielded	yes