

Item description/product images



Description

Material:

TPO (polypropylene and uncured EPDM rubber and polyethylene).

Version:

black.

Note:

These cable glands are suitable for routing cables. Cables, lines, hoses, pneumatic and hydraulic lines can be routed through. They offer comprehensive cable protection, as each cable/line is individually routed and secured. They seal hose bundles and prevent contamination getting inside.

Available with different routing plates or with blanking plates.

Plugs 80855-26 are available for the holes that are not used.

Temperature range:

-45°C to +95°C

Assembly:

The cable gland is mounted in the connection protector 80855-16 or the adapter 80855-20. To increase the clamping effect, a hose clip 07850 can be fitted to the free end.

Advantages:

The blanking plate can also be customised with specific holes. To do this, place the blanking plate in the freezer for ca. 8 hours. The plate can then be drilled. To improve the gripping effect, the hole diameter should be 0.5 mm smaller than the cable diameter.


Accessory:

Plugs 80855-26. Connection protector 80855-16. Adapter 80855-20.


© norelem www.norelem.com



Drawings

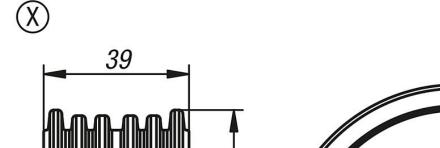

Ø82,5

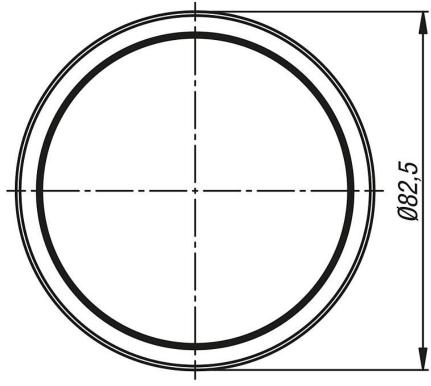

Overview of items

| Order No. | Form | Nominal size |
|----------------|------|--------------|
| 80855-25-07000 | X | 70 |