

Item description/product images



Description

Material:


Carbon steel.

Version:

Black oxidised.



Drawings

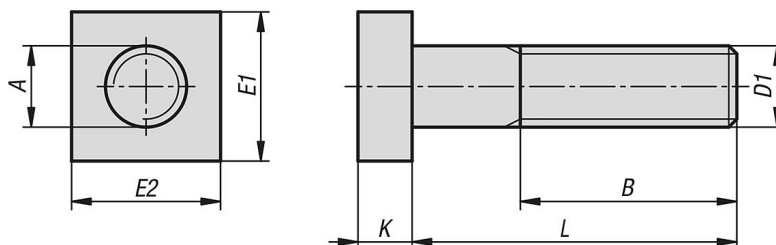

Overview of items

T-screws - inch

Order No.	A in inch	B in inch	D1 in inch	E1 in inch	E2 in inch	K in inch	L in inch	Version 1
07041-05-1A4L24	3/8	1.000	3/8-16	0.688	0.688	0.250	1.500	lightweight
07041-05-1A4L32	3/8	1.500	3/8-16	0.688	0.688	0.250	2.000	lightweight
07041-05-1A4L36	3/8	2.000	3/8-16	0.688	0.688	0.250	2.500	lightweight
07041-05-1A4L40	3/8	2.000	3/8-16	0.688	0.688	0.250	3.000	lightweight
07041-05-1A4L42	3/8	2.000	3/8-16	0.688	0.688	0.250	3.500	lightweight
07041-05-1A4L44	3/8	2.000	3/8-16	0.688	0.688	0.250	4.000	lightweight
07041-05-1A4L48	3/8	2.000	3/8-16	0.688	0.688	0.250	5.000	lightweight
07041-05-1A4L52	3/8	2.000	3/8-16	0.688	0.688	0.250	6.000	lightweight
07041-05-1A5L24	1/2	1.000	1/2-13	0.875	0.875	0.313	1.500	lightweight
07041-05-1A5L68	1/2	2.000	1/2-13	0.875	0.875	0.313	10.000	lightweight
07041-05-1A5L32	1/2	1.500	1/2-13	0.875	0.875	0.313	2.000	lightweight
07041-05-1A5L36	1/2	2.000	1/2-13	0.875	0.875	0.313	2.500	lightweight

Overview of items

Order No.	A in inch	B in inch	D1 in inch	E1 in inch	E2 in inch	K in inch	L in inch	Version 1
07041-05-1A5L40	1/2	2.000	1/2-13	0.875	0.875	0.313	3.000	lightweight
07041-05-1A5L42	1/2	2.000	1/2-13	0.875	0.875	0.313	3.500	lightweight
07041-05-1A5L44	1/2	2.000	1/2-13	0.875	0.875	0.313	4.000	lightweight
07041-05-1A5L48	1/2	2.000	1/2-13	0.875	0.875	0.313	5.000	lightweight
07041-05-1A5L52	1/2	2.000	1/2-13	0.875	0.875	0.313	6.000	lightweight
07041-05-1A5L56	1/2	2.000	1/2-13	0.875	0.875	0.313	7.000	lightweight
07041-05-1A5L60	1/2	2.000	1/2-13	0.875	0.875	0.313	8.000	lightweight
07041-05-1A6L24	5/8	1.000	5/8-11	1.125	1.125	0.406	1.500	lightweight
07041-05-1A6L32	5/8	1.500	5/8-11	1.125	1.125	0.406	2.000	lightweight
07041-05-1A6L36	5/8	2.000	5/8-11	1.125	1.125	0.406	2.500	lightweight
07041-05-1A6L40	5/8	2.000	5/8-11	1.125	1.125	0.406	3.000	lightweight
07041-05-1A6L42	5/8	2.000	5/8-11	1.125	1.125	0.406	3.500	lightweight
07041-05-1A6L44	5/8	2.000	5/8-11	1.125	1.125	0.406	4.000	lightweight
07041-05-1A6L48	5/8	2.000	5/8-11	1.125	1.125	0.406	5.000	lightweight
07041-05-1A6L52	5/8	2.000	5/8-11	1.125	1.125	0.406	6.000	lightweight
07041-05-1A6L56	5/8	2.000	5/8-11	1.125	1.125	0.406	7.000	lightweight
07041-05-1A6L60	5/8	2.000	5/8-11	1.125	1.125	0.406	8.000	lightweight
07041-05-1A7L40	3/4	2.000	3/4-10	1.313	1.313	0.531	3.000	lightweight
07041-05-1A7L42	3/4	2.000	3/4-10	1.313	1.313	0.531	3.500	lightweight
07041-05-1A7L44	3/4	2.000	3/4-10	1.313	1.313	0.531	4.000	lightweight
07041-05-1A7L48	3/4	2.000	3/4-10	1.313	1.313	0.531	5.000	lightweight
07041-05-1A7L52	3/4	2.000	3/4-10	1.313	1.313	0.531	6.000	lightweight
07041-05-1A7L56	3/4	2.000	3/4-10	1.313	1.313	0.531	7.000	lightweight
07041-05-1A7L60	3/4	2.000	3/4-10	1.313	1.313	0.531	8.000	lightweight
07041-05-2A4L24	3/8	1.000	3/8-16	0.688	0.688	0.250	1.500	heavy-duty version
07041-05-2A4L32	3/8	1.500	3/8-16	0.688	0.688	0.250	2.000	heavy-duty version
07041-05-2A4L36	3/8	2.000	3/8-16	0.688	0.688	0.250	2.500	heavy-duty version
07041-05-2A4L40	3/8	2.000	3/8-16	0.688	0.688	0.250	3.000	heavy-duty version
07041-05-2A4L42	3/8	2.000	3/8-16	0.688	0.688	0.250	3.500	heavy-duty version
07041-05-2A4L44	3/8	2.000	3/8-16	0.688	0.688	0.250	4.000	heavy-duty version
07041-05-2A4L48	3/8	2.000	3/8-16	0.688	0.688	0.250	5.000	heavy-duty version
07041-05-2A4L52	3/8	2.000	3/8-16	0.688	0.688	0.250	6.000	heavy-duty version
07041-05-2A5L24	1/2	1.000	1/2-13	0.875	0.875	0.313	1.500	heavy-duty version
07041-05-2A5L32	1/2	1.500	1/2-13	0.875	0.875	0.313	2.000	heavy-duty version
07041-05-2A5L36	1/2	2.000	1/2-13	0.875	0.875	0.313	2.500	heavy-duty version
07041-05-2A5L40	1/2	2.000	1/2-13	0.875	0.875	0.313	3.000	heavy-duty version
07041-05-2A5L42	1/2	2.000	1/2-13	0.875	0.875	0.313	3.500	heavy-duty version
07041-05-2A5L44	1/2	2.000	1/2-13	0.875	0.875	0.313	4.000	heavy-duty version
07041-05-2A5L48	1/2	2.000	1/2-13	0.875	0.875	0.313	5.000	heavy-duty version
07041-05-2A5L52	1/2	2.000	1/2-13	0.875	0.875	0.313	6.000	heavy-duty version
07041-05-2A6L32	5/8	1.500	5/8-11	1.125	1.125	0.406	2.000	heavy-duty version
07041-05-2A6L36	5/8	2.000	5/8-11	1.125	1.125	0.406	2.500	heavy-duty version
07041-05-2A6L40	5/8	2.000	5/8-11	1.125	1.125	0.406	3.000	heavy-duty version
07041-05-2A6L42	5/8	2.000	5/8-11	1.125	1.125	0.406	3.500	heavy-duty version
07041-05-2A6L44	5/8	2.000	5/8-11	1.125	1.125	0.406	4.000	heavy-duty version
07041-05-2A6L48	5/8	2.000	5/8-11	1.125	1.125	0.406	5.000	heavy-duty version
07041-05-2A6L52	5/8	2.000	5/8-11	1.125	1.125	0.406	6.000	heavy-duty version
07041-05-2A7L40	3/4	2.000	3/4-10	1.313	1.313	0.531	3.000	heavy-duty version
07041-05-2A7L42	3/4	2.000	3/4-10	1.313	1.313	0.531	3.500	heavy-duty version
07041-05-2A7L44	3/4	2.000	3/4-10	1.313	1.313	0.531	4.000	heavy-duty version
07041-05-2A7L48	3/4	2.000	3/4-10	1.313	1.313	0.531	5.000	heavy-duty version
07041-05-2A7L52	3/4	2.000	3/4-10	1.313	1.313	0.531	6.000	heavy-duty version
07041-05-2A7L56	3/4	2.000	3/4-10	1.313	1.313	0.531	7.000	heavy-duty version
07041-05-2A7L60	3/4	2.000	3/4-10	1.313	1.313	0.531	8.000	heavy-duty version