

Item description/product images



Description

Material:

Fibreglass reinforced thermoplastic.
Tapped bush brass.
Screw steel.


Version:

Grip, black.
Screw electro zinc-plated.

Drawing reference:

Form D: tapped bush, without cap
Form K: tapped bush
Form L: external thread

Drawings

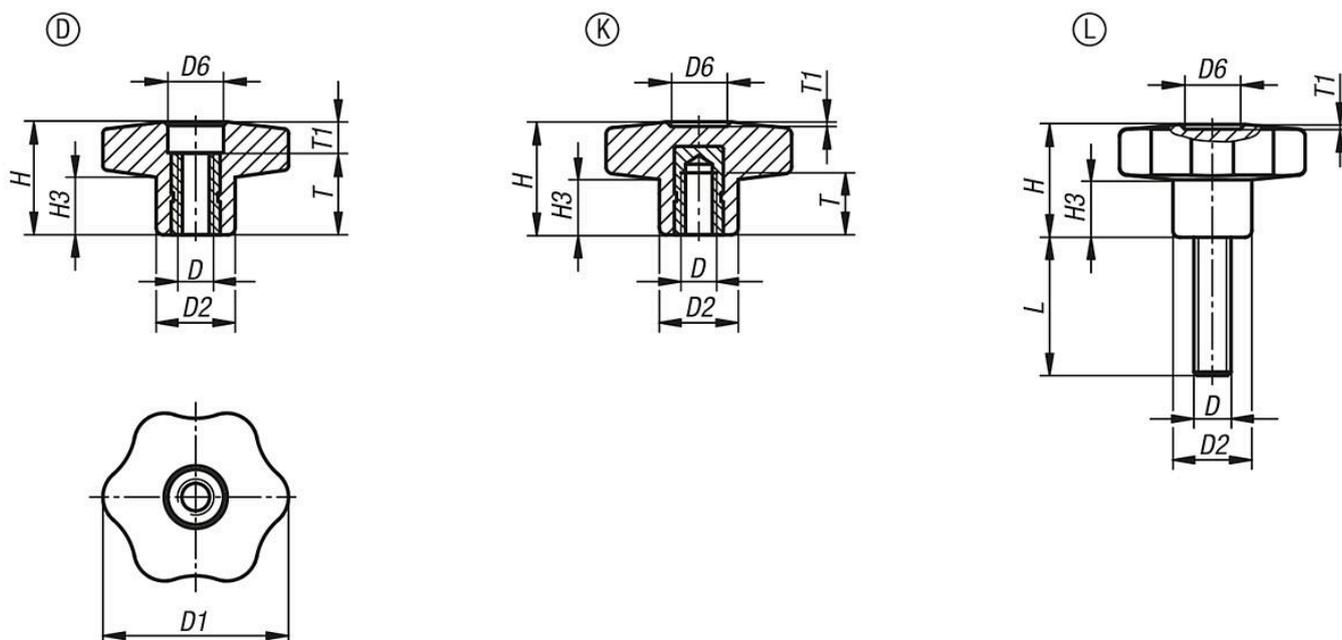

Overview of items

Order No.	Form	D	D1	D2	D6	H	H3	L	T	T1
06845-53005	D	M5	30	15	11	22	11	-	18	4
06845-53006	D	M6	30	15	11	22	11	-	18	4
06845-53008	D	M8	30	15	11	22	11	-	18	4
06845-54006	D	M6	40	17	12,5	24,5	12,5	-	18	6
06845-54008	D	M8	40	17	12,5	24,5	12,5	-	18	6
06845-54010	D	M10	40	17	12,5	24,5	12,5	-	18	6
06845-55008	D	M8	50	20	14	29	15,5	-	18	11
06845-55010	D	M10	50	20	14	29	15,5	-	18	11
06845-55012	D	M12	50	20	14	29	14	-	18	11
06845-56010	D	M10	60	24	16,5	34	18	-	18	16
06845-56012	D	M12	60	24	16,5	34	18	-	18	16
06845-23005	K	M5	30	15	9	22	11	-	14	1,5
06845-23006	K	M6	30	15	9	22	11	-	10	1,5
06845-24006	K	M6	40	17	12	24,5	12	-	16	1
06845-24008	K	M8	40	17	12	24,5	12	-	14	1
06845-24010	K	M10	40	17	12	24,5	12	-	14	1

Overview of items

Order No.	Form	D	D1	D2	D6	H	H3	L	T	T1
06845-25008	K	M8	50	20	14,5	29	15,5	-	14	1,5
06845-25010	K	M10	50	20	14,5	29	15,5	-	14	1,5
06845-25012	K	M12	50	20	14,5	29	15,5	-	18	1,5
06845-26010	K	M10	60	24	18	34	18	-	21	1,5
06845-26012	K	M12	60	24	18	34	18	-	18	1,5
06845-43006X	L	M6	30	15	9	22	11	16/20/30	-	1,5
06845-43008X	L	M8	30	15	9	22	11	16/20/30/40	-	1,5
06845-44006X	L	M6	40	17	12	24,5	12,5	16/20/30/40	-	1
06845-44008X	L	M8	40	17	12	24,5	12,5	20/30/40/50	-	1
06845-45008X	L	M8	50	20	14,5	29	15	20/30/40	-	1,5
06845-45010X	L	M10	50	20	14,5	29	15	20/30/40/50	-	1,5
06845-46010X	L	M10	60	24	18	34	18	20/30/40/50	-	1,5
06845-46012X	L	M12	60	24	18	34	18	20/30/40/50	-	1,5