


Item description/product images

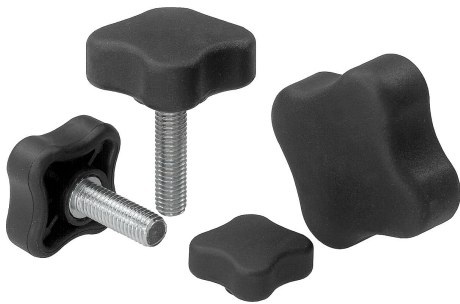

Description

Product description:

Extraordinary gripping safety combined with attractive design are key elements to outstanding functionality. The flat construction make these four lobe grips suitable for low working spaces.

Material, version:

Grip hard black thermoplastic.

Coating, soft thermoplastic, black.

internal thread electro zinc-plated brass.

Screw grade 5.8 electro zinc-plated steel


Note:

Flat four lobe grips are available in 5 sizes of internal and external threads.

On request:

Other screw sizes, screw lengths, versions and colours.

Drawings

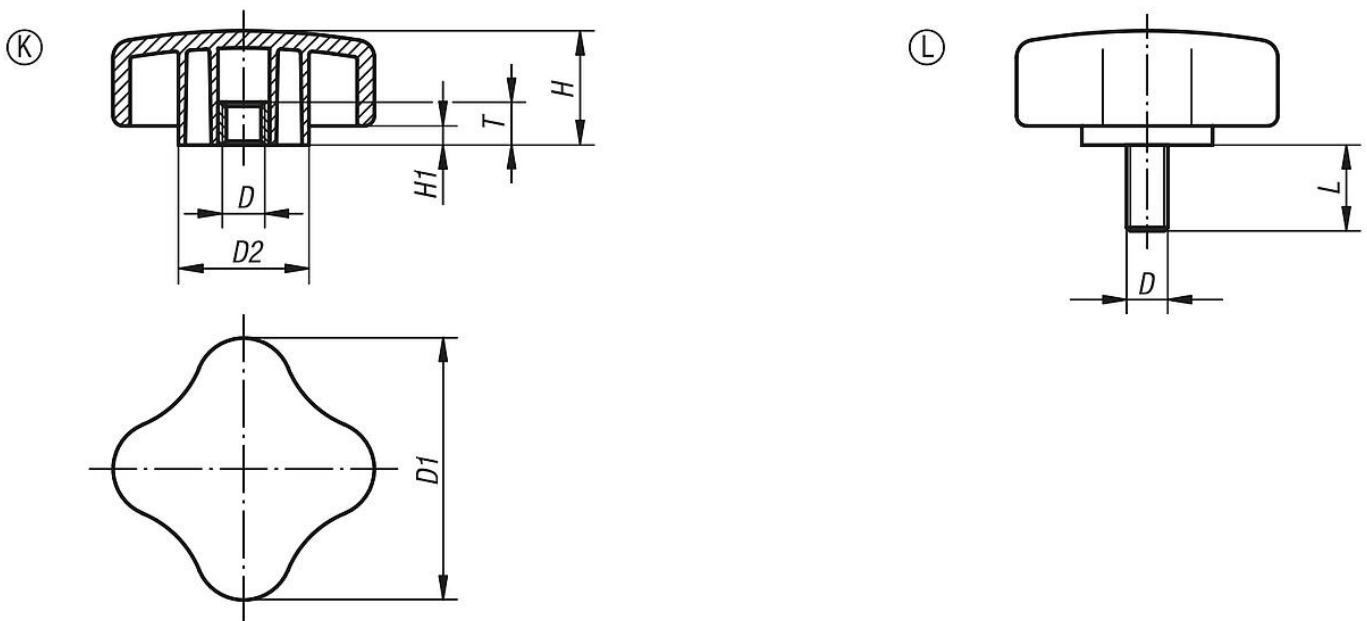

Overview of items

Four lobe grips, flat, with internal thread

Order No.	Form	D	D1	D2	H	H1	T
06855-3505	K	M5	35,5	14,2	15,5	2,8	12,5
06855-3506	K	M6	35,5	14,2	15,5	2,8	12,5
06855-4405	K	M5	44,5	17,5	19,3	3,3	12,5
06855-4406	K	M6	44,5	17,5	19,3	3,3	12,5
06855-4408	K	M8	44,5	17,5	19,3	3,3	12,5
06855-4410	K	M10	44,5	17,5	19,3	3,3	12,5
06855-5005	K	M5	50,8	23,6	22,1	3,8	12,5
06855-5006	K	M6	50,8	23,6	22,1	3,8	12,5
06855-5008	K	M8	50,8	23,6	22,1	3,8	12,5
06855-5010	K	M10	50,8	23,6	22,1	3,8	12,5
06855-6306	K	M6	63,5	31,7	27,7	4,6	12,5

Overview of items

Order No.	Form	D	D1	D2	H	H1	T
06855-6308	K	M8	63,5	31,7	27,7	4,6	12,5
06855-6310	K	M10	63,5	31,7	27,7	4,6	12,5
06855-6312	K	M12	63,5	31,7	27,7	4,6	12,5
06855-7608	K	M8	76,2	38,1	33,3	5,6	12,5
06855-7610	K	M10	76,2	38,1	33,3	5,6	12,5
06855-7612	K	M12	76,2	38,1	33,3	5,6	12,5

Flat four lobe grips, flat, with external thread

Order No.	Form	D	D1	D2	H	H1	L
06855-3506X	L	M6	35,5	14,2	15,5	2,8	15/20/25/35
06855-4406X	L	M6	44,5	17,5	19,3	3,3	15/20/25/35
06855-4408X	L	M8	44,5	17,5	19,3	3,3	16/25/35
06855-4410X	L	M10	44,5	17,5	19,3	3,3	20/30/40/50
06855-5006X	L	M6	50,8	23,6	22,1	3,8	15/25/35
06855-5008X	L	M8	50,8	23,6	22,1	3,8	16/25/35
06855-5010X	L	M10	50,8	23,6	22,1	3,8	30/40/50
06855-6306X	L	M6	63,5	31,7	27,7	4,6	15/20/25/35
06855-6308X	L	M8	63,5	31,7	27,7	4,6	16/25/35
06855-6310X	L	M10	63,5	31,7	27,7	4,6	30/40/50
06855-7608X	L	M8	76,2	38,1	33,3	5,6	16/25/35
06855-7610X	L	M10	76,2	38,1	33,3	5,6	30/50