

Item description/product images

**Description****Material:**

Housing and cap POM.

Bearing ball stainless steel.

Load ball stainless steel or plastic.

Version:

Stainless steel, hardened.

Note:

The ball transfer units are made of a certified blue plastic which is suitable for use in the foodstuff sector. The ball transfer units are equipped with a gap-free and sealed cap, which prevents the formation of soiled edges.

The dirt holes on the lower side of the housing facilitate particularly easy cleaning of the ball transfer units.

Conveying speed up to 1.5 m/s.

Food compliant: Food grade, EU Regulation 1935/2004, EU Regulation 10/2011.

Cap and housing made from POM, bearing balls from stainless steel, load balls from POM or stainless steel.


Temperature range:

-30 °C to +50 °C (up to +30°C with plastic load balls)

Drawing reference:

- 1) Load ball
- 2) Bearing ball

Drawings

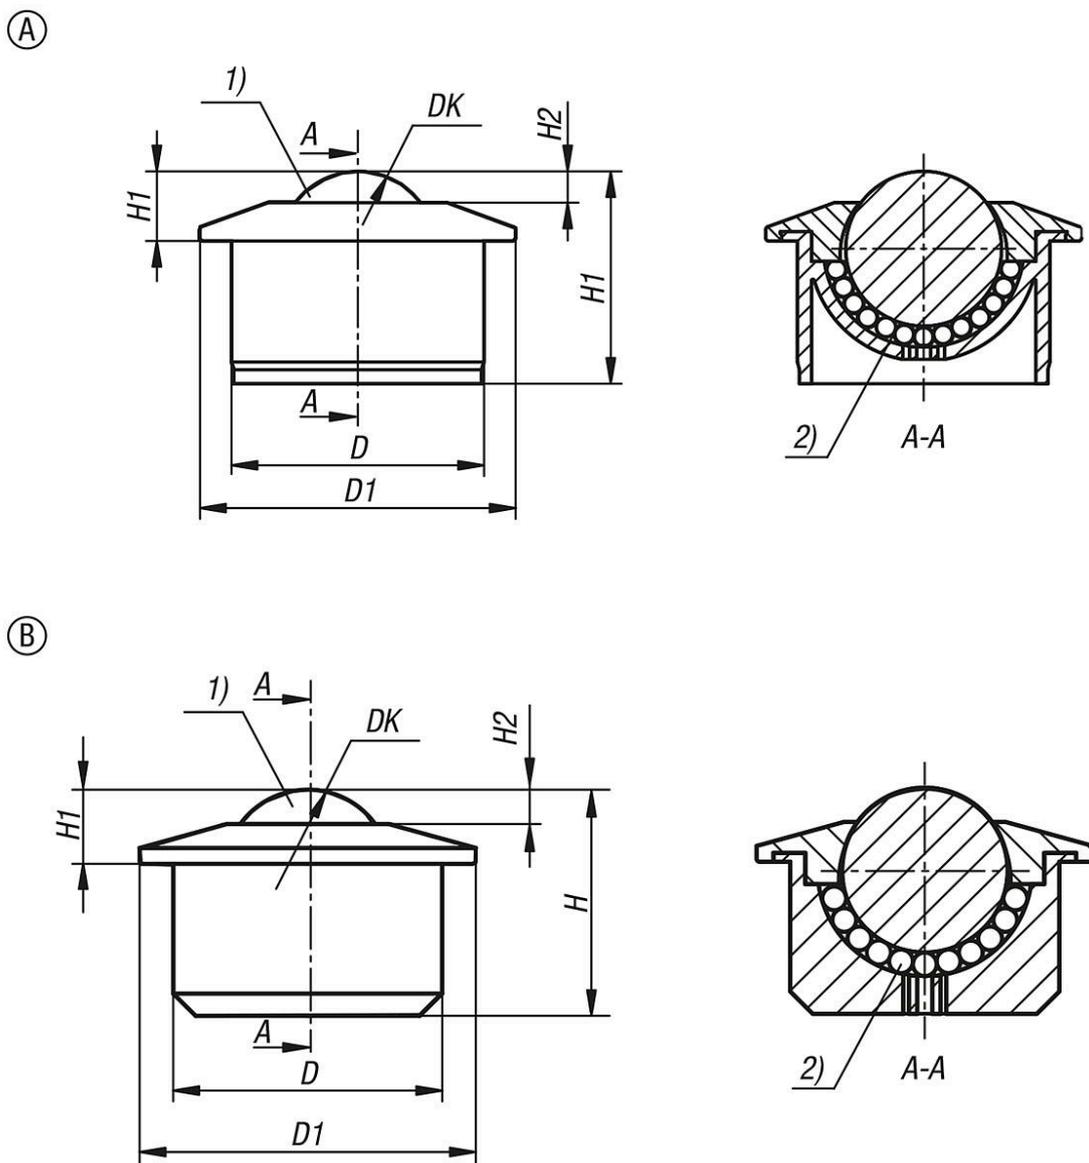

Overview of items

Ball transfer units with plastic housing

Order No.	Form	Material load ball	Material bearing ball	D	D1	DK	H	H1	H2	Load rating C (N)	Kind of fastening
95153-1501	A	Polyamide	Stainless steel	24±0,1	31±0,2	15,875	20,5±0,2	9,5±0,2	4,5	200	press-in
95153-1511	A	Stainless steel	Stainless steel	24±0,1	31±0,2	15,875	20,5±0,2	9,5±0,2	4,5	200	press-in
95153-2201	A	Polyamide	Stainless steel	36±0,1	45±0,2	22,225	30,5±0,2	10±0,2	4,5	250	press-in
95153-2211	A	Stainless steel	Stainless steel	36±0,1	45±0,2	22,225	30,5±0,2	10±0,2	4,5	250	press-in
-	B	Polyamide	Stainless steel	24±0,1	31±0,2	15,875	20,5±0,2	9,5±0,2	4,5	200	press-in
95153-151	B	Stainless steel	Stainless steel	24±0,1	31±0,2	15,875	20,5±0,2	9,5±0,2	4,5	200	press-in
95153-221	B	Stainless steel	Stainless steel	36±0,1	45±0,2	22,225	30,5±0,2	10±0,2	4,5	250	press-in
95153-300	B	Polyamide	Stainless steel	45±0,1	55±0,1	30	37±0,1	14±0,1	5,5	350	press-in
95153-301	B	Stainless steel	Stainless steel	45±0,1	55±0,1	30	37±0,1	14±0,1	5,5	350	press-in
95153-440	B	Polyamide	Stainless steel	62±0,1	75±0,1	44,5	53,5±0,1	19±0,1	9	500	press-in
95153-441	B	Stainless steel	Stainless steel	62±0,1	75±0,1	44,5	53,5±0,1	19±0,1	9	500	press-in

