


Item description/product images

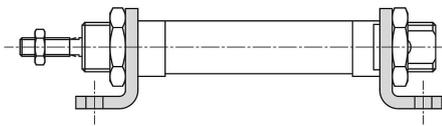

Description

Material:
Steel.


Version:
Electro zinc-plated.

Note:
Foot brackets for ISO 6432 round cylinders.
A foot bracket is used for the fixed mounting of ISO 6432 pneumatic cylinders. The pneumatic cylinder is usually mounted with two foot brackets, one at the top and one at the bottom.

However, it is also possible to mount it using only one foot bracket at the top or bottom. Mount on the top for pull applications and on the bottom for push applications.

Supplied with:
Supplied singly.

Drawings

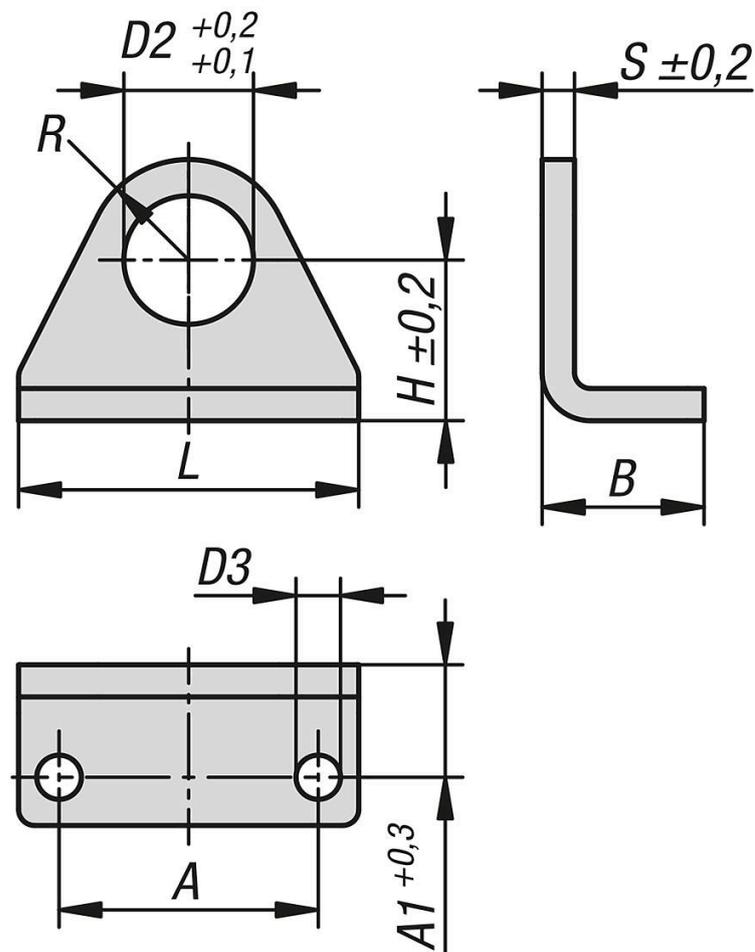

Overview of items

Foot brackets for ISO 6432

Order No.	A	A1	B	D2	D3	thickness	H	L	Suitable for	R	Cylinder Ø
12020-0812	25	11	16	12	4,5	3	16	35	DIN ISO 6432	10	8-10
12020-1216	32	14	20	16	5,5	4	20	42	DIN ISO 6432	12,5	12-16
12020-2025	40	17	25	22	6,6	5	25	54	DIN ISO 6432	20	20-25