


Item description/product images

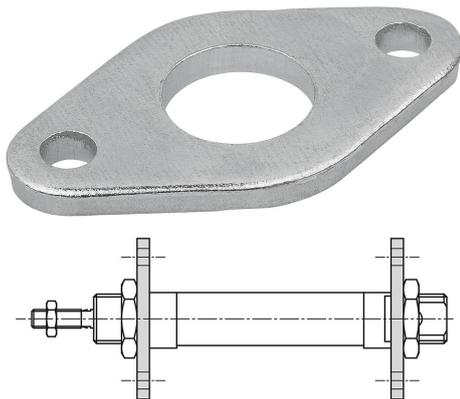

Description

Material:

Steel.

Version:

Electro zinc-plated.

Note:

Flange mounting for ISO 6432 round cylinders.


The flange mountings are used for the fixed mounting of ISO 6432 pneumatic cylinders. The pneumatic cylinder is usually mounted with two flange mountings at the top and bottom.

However, it is also possible to mount them using only one flange mounting at the top or bottom. Mount on the top for pull applications and on the bottom for push applications.

Supplied with:

Supplied singly.

Drawings

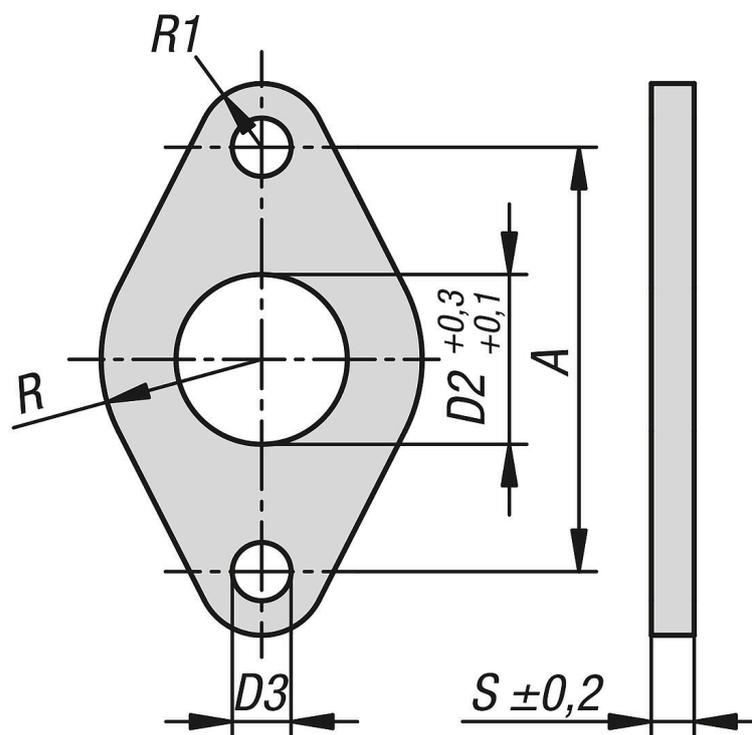

Overview of items

Flange mountings for ISO 6432

| Order No. | A | D2 | D3 | thickness | R1 | R | Cylinder Ø | Suitable for |
|---------------|----|----|-----|-----------|----|----|---------------|--------------|
| 12020-02-0812 | 30 | 12 | 4,5 | 3 | 5 | 11 | 8-10 | DIN ISO 6432 |

Overview of items

| Order No. | A | D2 | D3 | thickness | R1 | R | Cylinder Ø | Suitable for |
|---------------|----|----|-----|-----------|----|----|---------------|--------------|
| 12020-02-1216 | 40 | 16 | 5,5 | 4 | 6 | 15 | 12-16 | DIN ISO 6432 |
| 12020-02-2025 | 50 | 22 | 6,6 | 5 | 8 | 20 | 20-25 | DIN ISO 6432 |