


Item description/product images

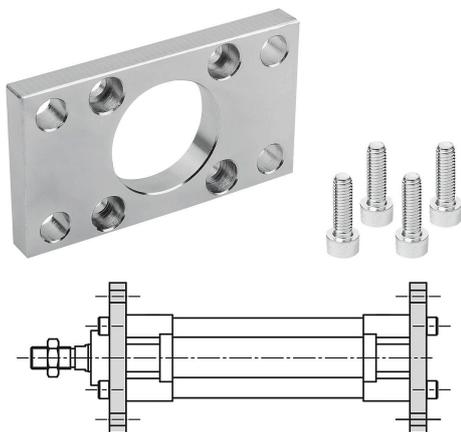

Description

Material:

Steel.

Version:

Electro zinc-plated.

Note:

Flange bracket for DIN ISO 15552 and DIN ISO 21287 standard and compact cylinders. This flange bracket is used for the fixed mounting of pneumatic cylinders.

As a rule, the pneumatic cylinder is mounted with two flange brackets, one at the top one at the bottom.


However, it is also possible to mount them using only one flange bracket at the top or bottom.

Supplied with:

1 flange bracket.

4 cap screws.

Drawings

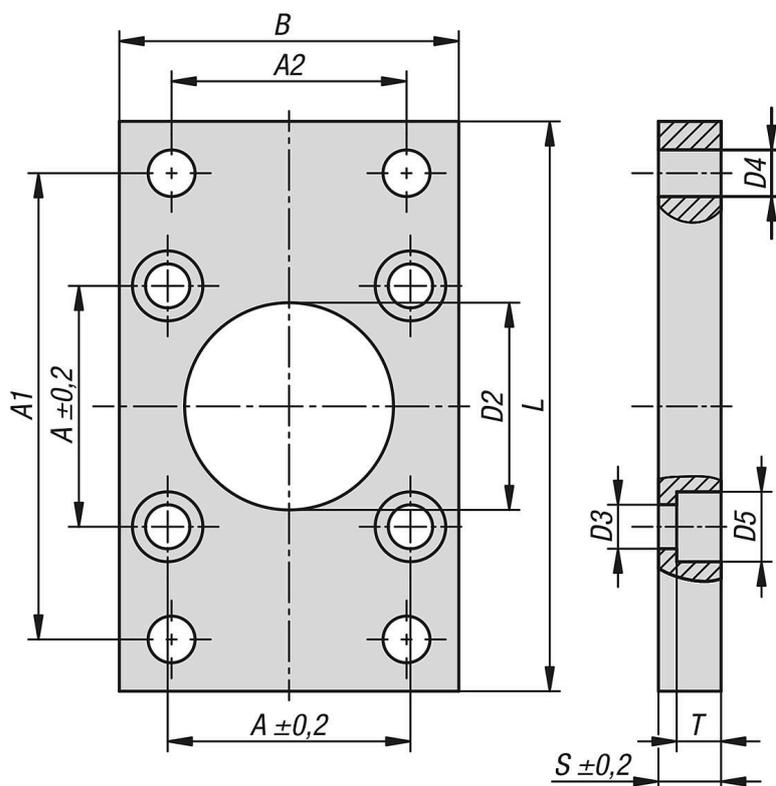

Overview of items

Flange brackets for ISO 15552 / 21287

Overview of items

Order No.	A	A1	A2	B	D2	D3	D4	D5	thickness	L	T	Cylinder Ø	Socket head screw DIN 912	Suitable for
12021-02-1032	32,5	64	32	45	30	6,5	7	10,5	10	80	6,5	32	M6X20	DIN ISO 15552 / 21287
12021-02-1040	38	72	36	52	35	6,5	9	10,5	10	90	6,5	40	M6X20	DIN ISO 15552 / 21287
12021-02-1050	46,5	90	45	65	40	8,5	9	13,5	12	110	8,5	50	M8X20	DIN ISO 15552 / 21287
12021-02-1063	56,5	100	50	75	45	8,5	9	13,5	12	120	8,5	63	M8X20	DIN ISO 15552 / 21287
12021-02-1080	72	126	63	95	45	10,5	12	16,5	16	150	10,5	80	M10x25	DIN ISO 15552 / 21287