


Item description/product images

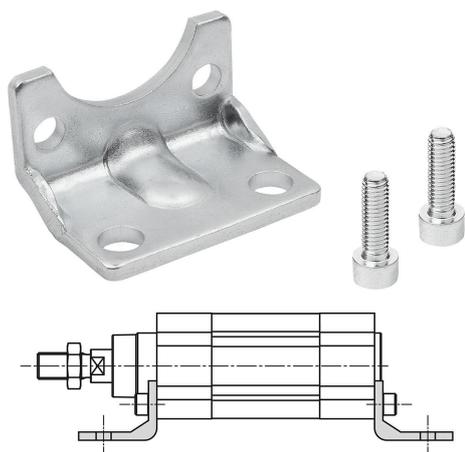

Description

Material:

Steel.

Version:

Electro zinc-plated.

Note:

Foot brackets for DIN ISO 15552 and DIN ISO 21287 standard and compact cylinders. A foot bracket is used for the fixed mounting of pneumatic cylinders.

As a rule, a pneumatic cylinder is mounted using two foot brackets, one at the top and one on the bottom.


However, it is also possible to mount it using only one foot bracket at the top or bottom.

Supplied with:

1 foot bracket.

2 cap screws.

Drawings

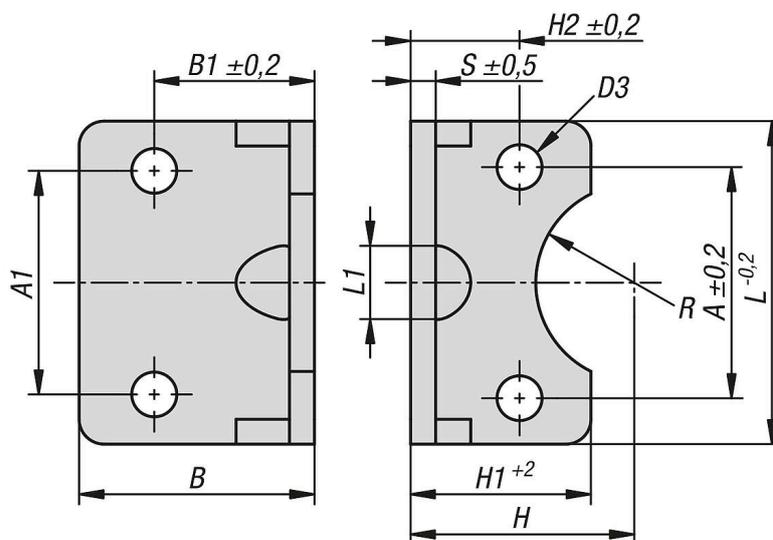

Overview of items

Foot brackets for ISO 15552 / 21287

Order No.	A	A1	B	B1	D3	D4	thickness	H	H1	H2	L	L1	R	Cylinder Ø	Socket head screw DIN 912	Suitable for
12021-1032	32,5	32	35	24	7	7	4	32	30	15,75	45	11	15	32	M6X18	DIN ISO 15552 / 21287
12021-1040	38	36	36	28	7	9	4	36	30	17	52	15	17,5	40	M6X18	DIN ISO 15552 / 21287
12021-1050	46,5	45	47	32	9	9	5	45	36	21,75	65	16	20	50	M8X20	DIN ISO 15552 / 21287
12021-1063	56,5	50	45	32	9	9	5	50	35	21,75	75	18	22,5	63	M8X20	DIN ISO 15552 / 21287
12021-1080	72	63	55	41	11	12	6	63	47	27	95	17	22,5	80	M10x20	DIN ISO 15552 / 21287

