

Item description/product images

**Description****Material:**

Housing steel.

Balls and springs stainless steel.

Version:

Housing nickel-plated.

Balls tempered.

Note:

The 3 balls inside the bushing hold the locking pin with the specified retaining force.

Installation option 1: min. plate thickness 6 mm.

Installation option 2: max. plate thickness 10 mm.

Installation option 3: plate thickness > 10 mm.


Installation option 4: blind hole.

On request:



Suitable nuts.

Accessory:

Locking pin 03192-04.

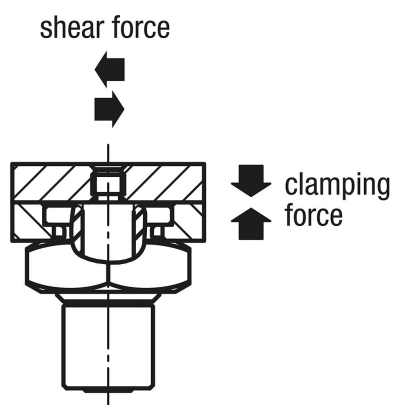

Drawings

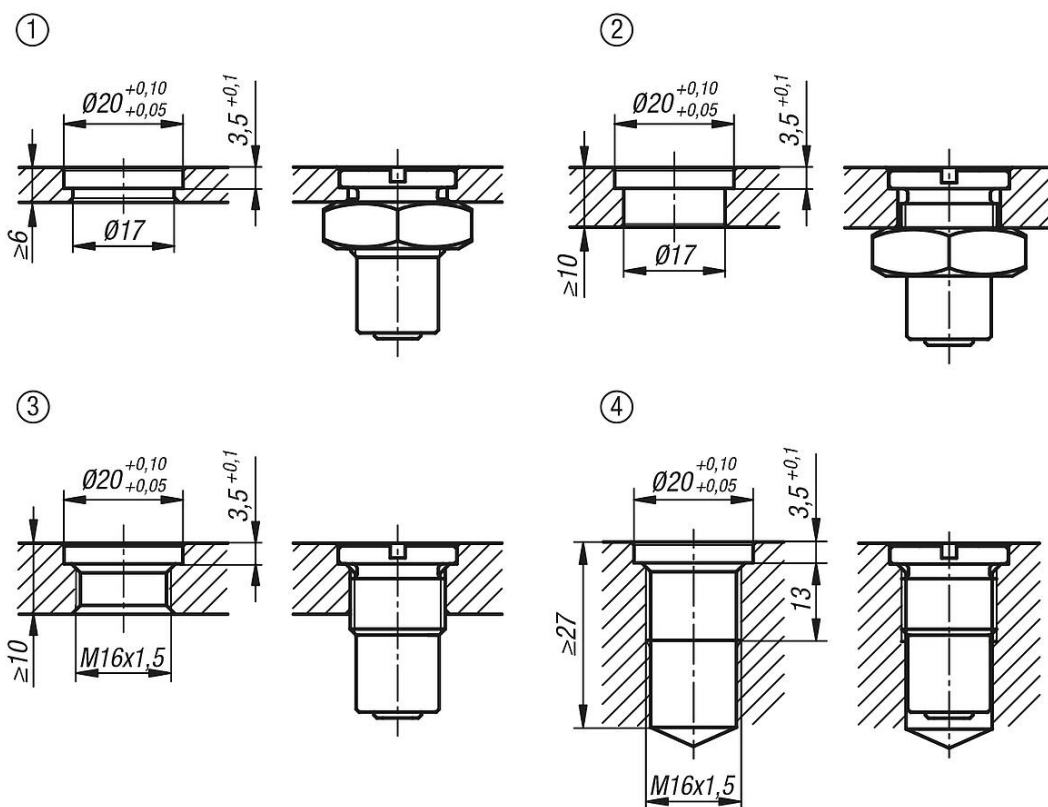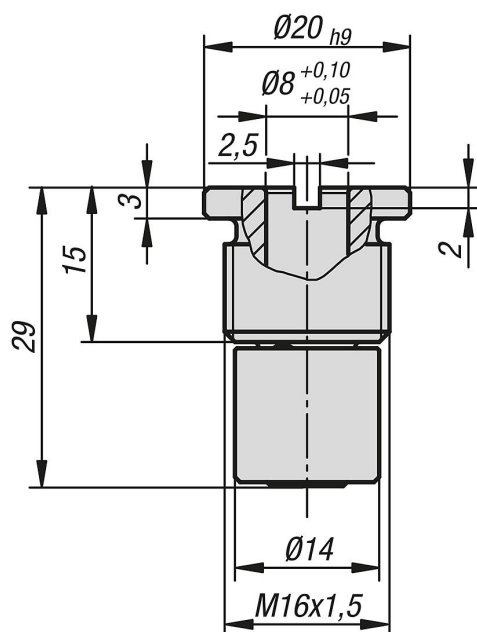

Overview of items

Order No.	Clamping force N	Shearing force kN	Temperature resistance
03192-03-7	7	1,8	≤180 °C
03192-03-15	15	1,8	≤180 °C

