

Item description/product images



Description

Material:

Housing and locking elements steel.
Balls and springs stainless steel.

Version:

Housing and locking element nickel-plated.
Balls tempered.

Note:



The 3 balls inside the bushing hold the locking pin with the specified retaining force.
The element is secured or released by twisting the bottom part of the bush.
Installation option 1: min. plate thickness 6 mm.
Installation option 2: max. plate thickness 10 mm.
Installation option 3: plate thickness > 10 mm.
Installation option 4: blind hole.

On request:

Suitable nuts.

Accessory:

Locking pin 03192-04.

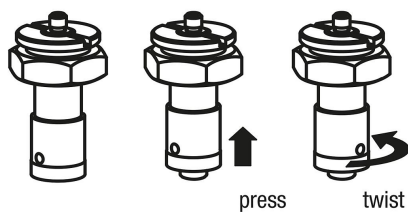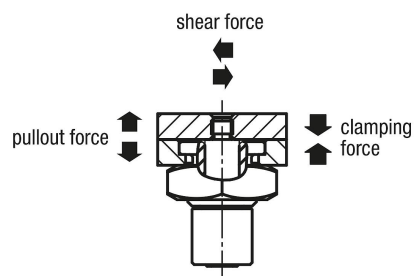


not locked



locked

Drawings

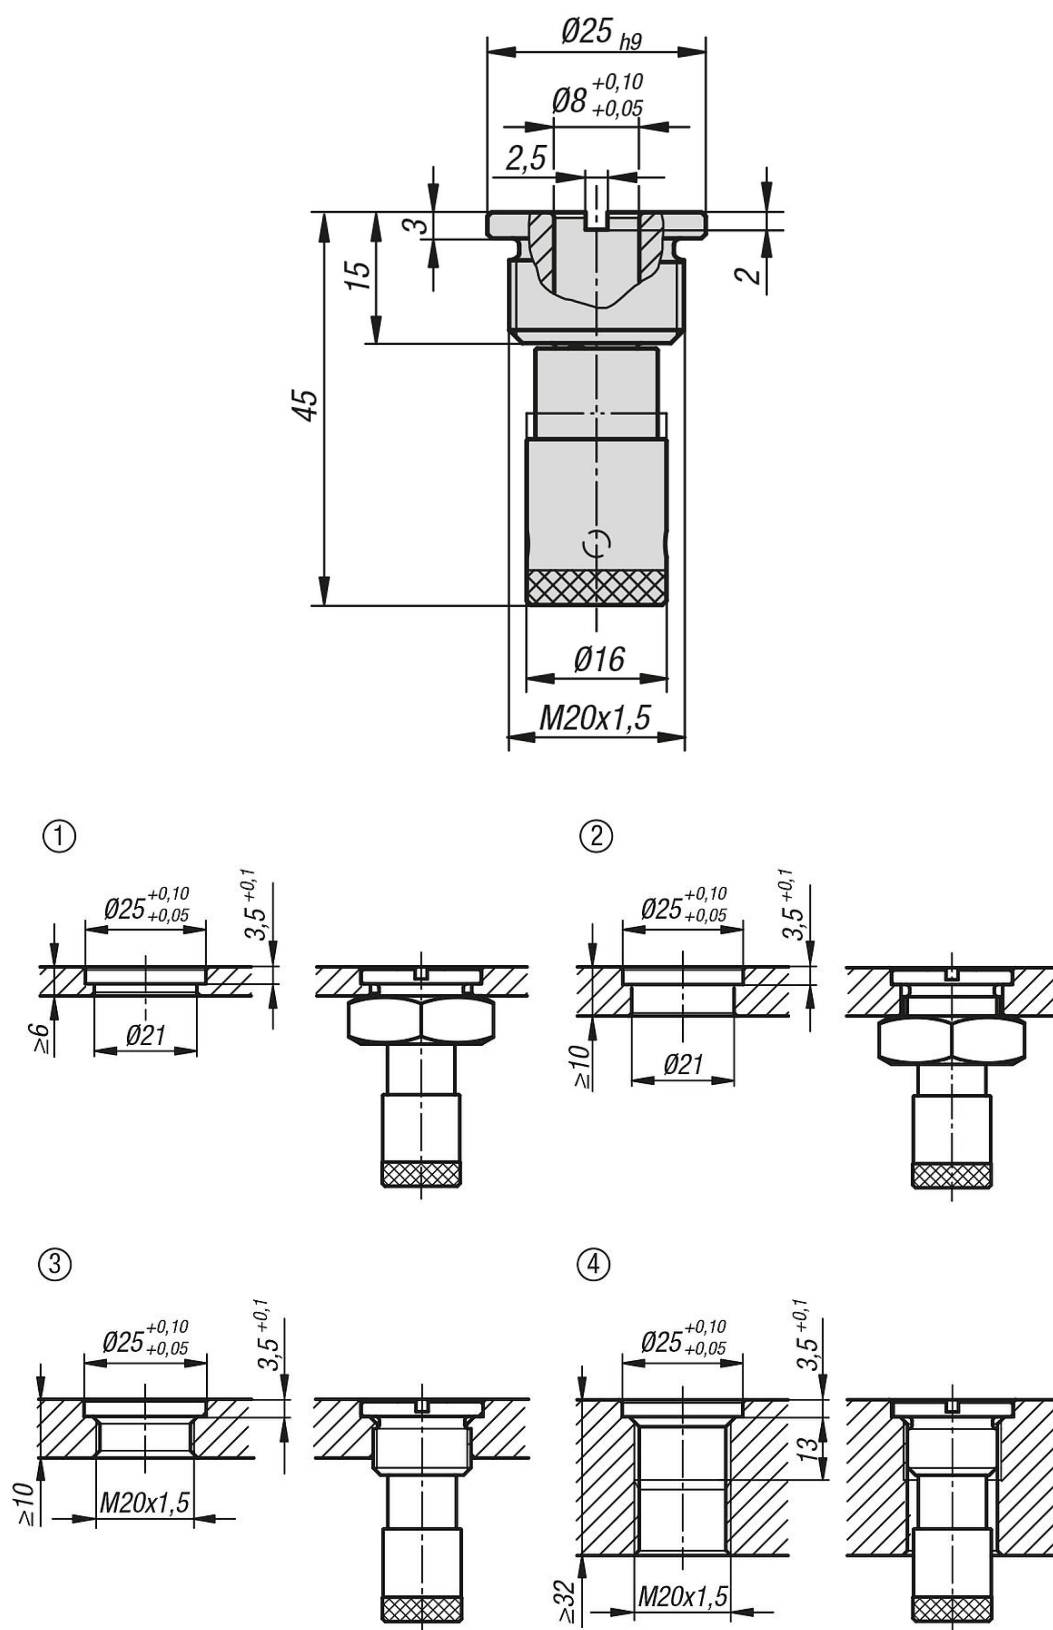

Overview of items

Ball lock bushes with twist lock

Overview of items

Order No.	Clamping force N	Shearing force kN	Pullout force F kN	Temperature resistance
03192-03-71	7	1,8	1,8	≤180 °C
03192-03-151	15	1,8	1,8	≤180 °C