Item description/product images



Description

Material:
High-performance fibreglass reinforced thermoplastic. Pin stainless steel 1.4305. Pin stainless steel 1.4404.

Version:
Hinge black.
Pin bright.


Note:
The loading values given are non-binding reference values for the hinge without consideration of safety factors and exclude any liability. The non-binding values given are for information purposes only and do not constitute a legally binding assurance of properties.

The load values have been determined under laboratory conditions. Each user must determine individually whether the hinge is suitable for the respective application.

Different materials onto which the hinges are installed and the type of mounting, weather conditions and wear can influence the determined values.

Accessory:
07175 Countersunk screws with hex socket DIN EN ISO 10642.
07210 Hexagon nuts DIN 934.
07300-01 DIN 433 washer, steel or stainless steel.

Drawings

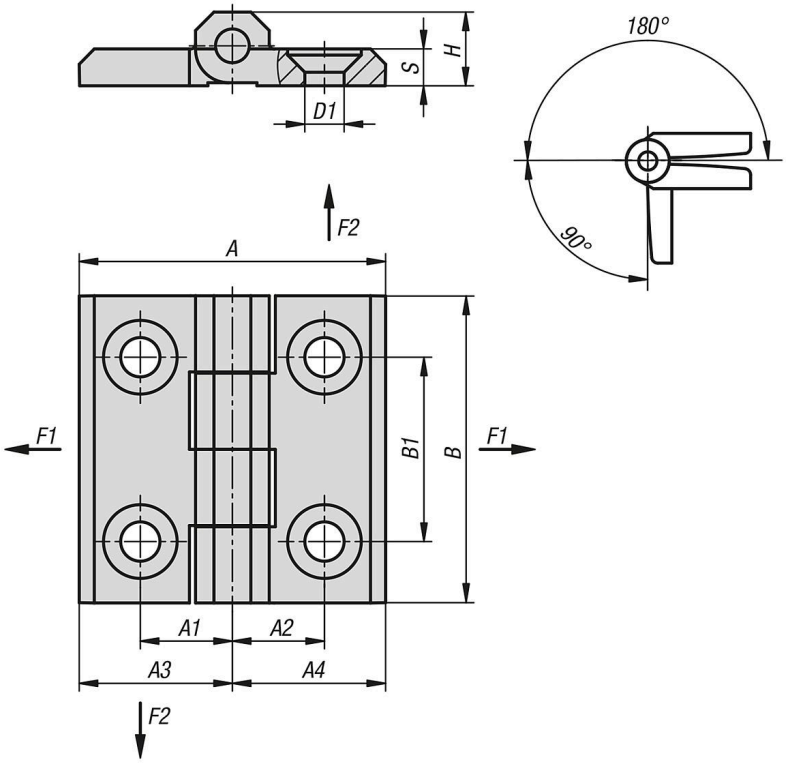

Overview of items

Hinges, plastic, square

Order No.	Steel key	A	A1	A2	A3	A4	B	B1	D1	H	S	Opening angle	F1 N	F2 N
27849-040300302	1.4305	30	9	9	15	15	30	18	4,3	7,5	4	270°	2500	855
27849-050400402	1.4305	40	12,5	12,5	20	20	40	25	5,3	9,5	5	270°	3860	2030
27849-060500502	1.4305	50	15	15	25	25	50	30	6,4	12	6	270°	5530	2270
27849-080600602	1.4305	60	18	18	30	30	60	36	8,4	15,5	8	270°	8050	3150
27849-040300304	1.4404	30	9	9	15	15	30	18	4,3	7,5	4	270°	2500	855
27849-050400404	1.4404	40	12,5	12,5	20	20	40	25	5,3	9,5	5	270°	3860	2030
27849-060500504	1.4404	50	15	15	25	25	50	30	6,4	12	6	270°	5530	2270
27849-080600604	1.4404	60	18	18	30	30	60	36	8,4	15,5	8	270°	8050	3150