

Item description/product images



Description

Material:

Spring steel 1.1200

Version:

Galvanised or black plastic coated.


Note:

Spring clips can be used to hold cylindrical objects such as pipes, hoses and tools in place by means of spring tension. They permit cylindrical objects to be securely held and quickly removed.

The spring clips can be secured at the base using screws or rivets.

Models with a plastic coating offer enhanced protection for sensitive components.

Drawings

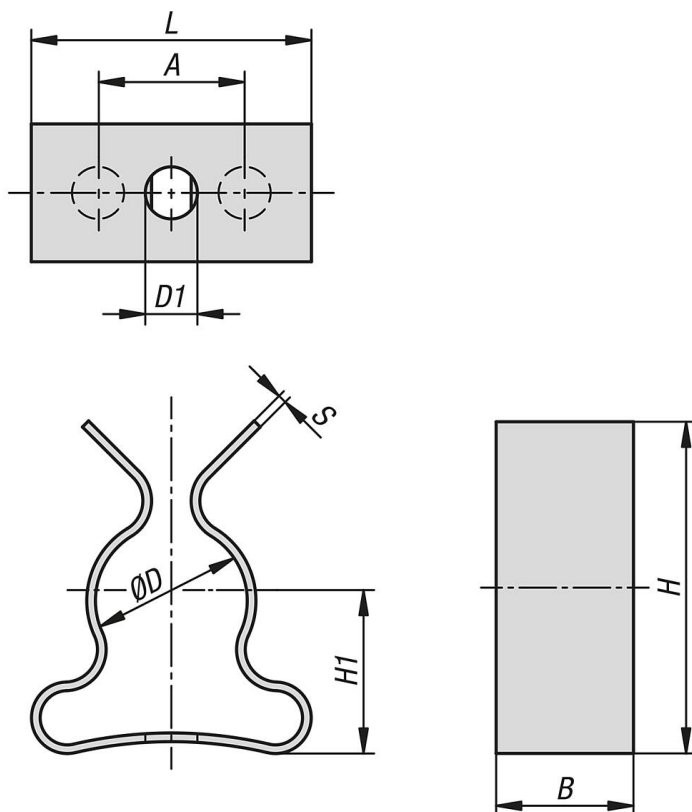

Overview of items

Spring clips closed

Order No.	Surface finish body	A	B	D	D1	thickness	H	H1	L	Clamping range mm	No. of holes
07852-106	galvanised	-	6,35	6	2,4	0,4	15,3	7	12,9	6-7	1
07852-110	galvanised	-	6,35	10	2,4	0,5	20	9	15,5	10-12	1
07852-113	galvanised	-	7,94	13	3,2	0,5	26,4	11	20,1	13-14	1
07852-116	galvanised	-	7,94	16	3,2	0,5	32,2	15	22,6	16-19	1
07852-119	galvanised	-	7,94	19	3,2	0,6	36,4	18	25,3	19-21	1
07852-125	galvanised	-	8	25	3,2	0,65	40,3	20	28,8	25-27	1
07852-128	galvanised	-	9,52	28	3,6	0,65	48,7	30	34,1	28-31	1
07852-132	galvanised	-	11,1	32	3,6	0,8	59,3	40	42,8	32-34	1
07852-138	galvanised	8	12,7	38	4	0,92	67	40	49,5	38-40	2
07852-151	galvanised	12,7	12,7	51	4	0,92	80,2	40	53	51-54	2
07852-206	plastic-coated	-	6,35	6	2,4	0,4	15,3	7	12,9	6-7	1
07852-210	plastic-coated	-	6,35	10	2,4	0,5	20	9	15,5	10-12	1
07852-213	plastic-coated	-	7,94	13	3,2	0,5	26,4	11	20,1	13-14	1
07852-216	plastic-coated	-	7,94	16	3,2	0,5	32,2	15	22,6	16-19	1
07852-219	plastic-coated	-	7,94	19	3,2	0,6	36,4	18	25,3	19-21	1
07852-225	plastic-coated	-	8	25	3,2	0,65	40,3	20	28,8	25-27	1
07852-228	plastic-coated	-	9,52	28	3,6	0,65	48,7	30	34,1	28-31	1
07852-232	plastic-coated	-	11,1	32	3,6	0,8	59,3	40	42,8	32-34	1
07852-238	plastic-coated	8	12,7	38	4	0,92	67	40	49,5	38-40	2
07852-251	plastic-coated	12,7	12,7	51	4	0,92	80,2	40	53	51-54	2