
80162 Connection cable GST15i3 socket – open cable end

Item description/product images





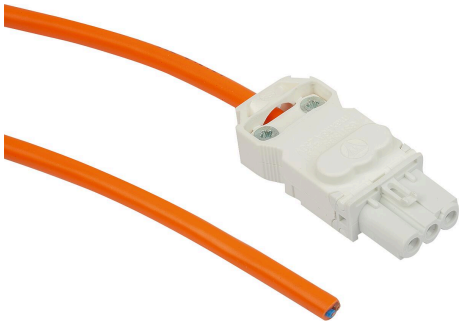

Description

Material:
Housing: polyamide (PA).
Cable: PVC.
Wire Insulation: PVC
Wire core: copper.

Version:
Housing: socket (female).
Housing colour: white.
Cable colour: orange.
Wire colour coding: as per DIN EN 0293-308.

Note:
Connection cables for powering LED lamps.


End 1: GST15i3 socket. Self-locking (can be released using tools).

End 2: exposed cable end.

For use in dry rooms for connecting light electrical appliances subject to moderate mechanical stress.

Temperature range:
By flexible layout: -5 °C to +70 °C.
By fixed layout: -40 °C to +70 °C.

Drawings

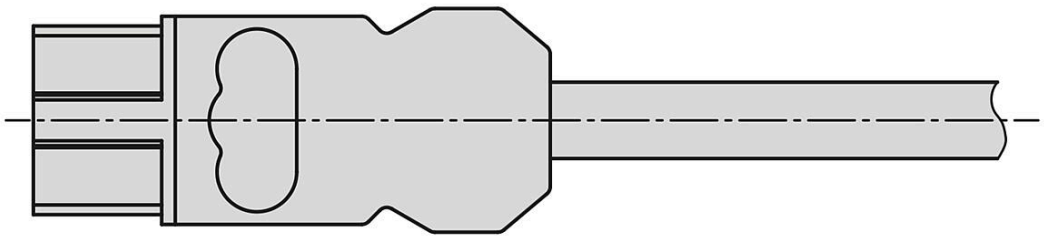

Overview of items

Connection cable GST15i3 socket – open cable end

Order No.	L	Connection	No. of conductors x conductor cross-section
80162-203X3000	3000	WIELAND GST15I3	3X0,5 mm²

Overview of items

Order No.	Rated current A	Cable type	Safety rating
80162-203X3000	16	H03VV-F	IP20