Item description/product images



Description

Material:
Plates, thermoplastic, fibreglass reinforced.
Anti-slip plate thermoplastic elastomer.

Version:
black.


Note:
Levelling feet consist of a plate and a threaded spindle. Any plate can be combined with any threaded spindle.
The anti-slip plate absorbs vibrations and prevents the levelling foot slipping.
For matching threaded spindles see 27828.

On request:
Assembled levelling feet.
ESD antistatic plate.
Other colours.

Drawing reference:
Form A without screw-on hole, without anti-slip plate
Form B without screw-on hole, with anti-slip plate
Form C with screw-on hole (closed), without anti-slip plate
Form D with screw-on hole (closed), with anti-slip plate
Form E with screw-on hole (open), without anti-slip plate
Form F with screw-on hole (open), with anti-slip plate

1) From plate Ø 79

Drawings

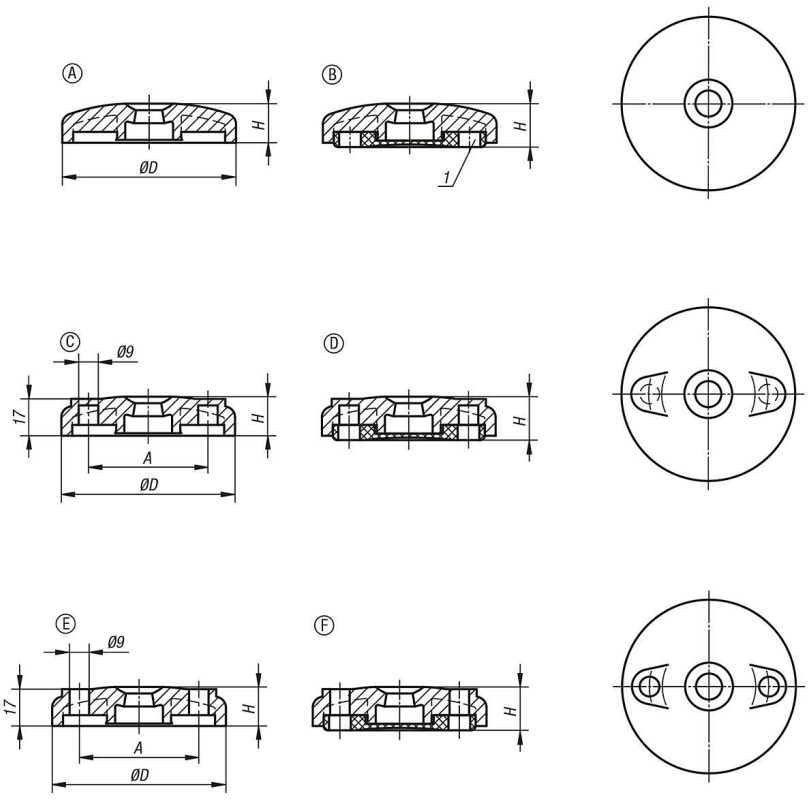

Overview of items

Order No.	Form	Size	D	A	H	Load rating max. kN
27815-1050	A	50	49	-	18	12
27815-1060	A	60	59	-	18	12
27815-1080	A	80	79	-	18	12
27815-1100	A	100	99	-	18	12
27815-2050	B	50	49	-	20	12
27815-2060	B	60	59	-	20	12
27815-2080	B	80	79	-	20	12
27815-2100	B	100	99	-	20	12
27815-3080	C	80	79	55	18	12
27815-3100	C	100	99	74	18	12
27815-4080	D	80	79	55	20	12
27815-4100	D	100	99	74	20	12
27815-5080	E	80	79	55	18	12
27815-5100	E	100	99	74	18	12
27815-6080	F	80	79	55	20	12
27815-6100	F	100	99	74	20	12