


Item description/product images

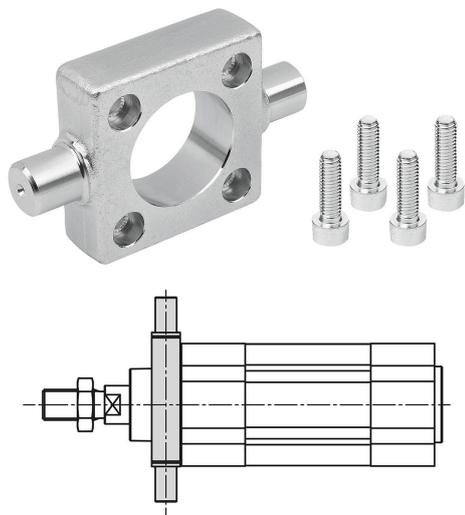

Description

Material:

Steel.

Version:

Electro zinc-plated.

Note:

Swivel flange for DIN ISO 15552 and DIN ISO 21287 standard and compact cylinders. A swivel flange is used for the swivel mounting of pneumatic cylinders.

Can be mounted on the top or bottom.


Supplied with:

- 1 swivel flange.
- 4 cap screws.

Accessory:

Bearing block 12021-09.

Drawings

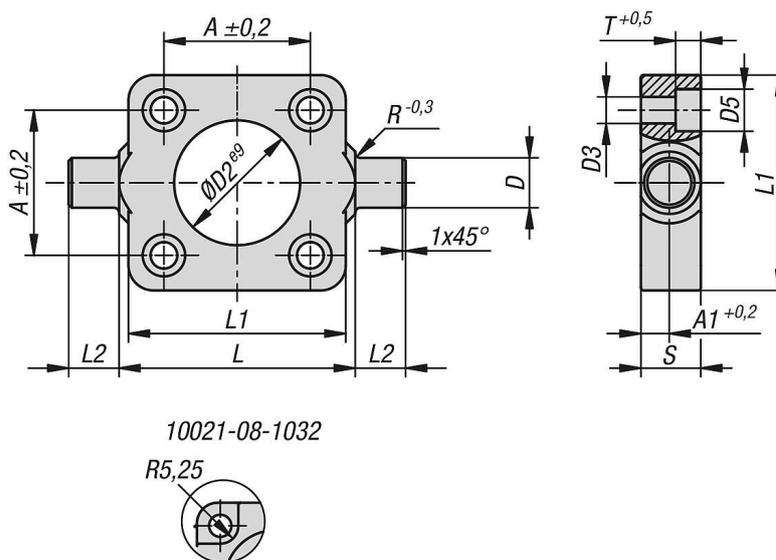

Overview of items

Swivel flange for ISO 15552 / 21287

Order No.	A	A1	D	D2	D3	D5	L	L1 max.	L2	R	S max.	T	Cylinder Ø	Socket head screw DIN 912	Suitable for
12021-08-1032	32,5	6,5	12	30	6,5	-	50	46	12	1	14	6	32	M6X20	DIN ISO 15552 / 21287
12021-08-1040	38	9	16	35	6,5	10,5	63	59	16	1,6	19	6	40	M6X25	DIN ISO 15552 / 21287
12021-08-1050	46,5	9	16	40	8,5	13,5	75	69	16	1,6	19	8	50	M8X25	DIN ISO 15552 / 21287
12021-08-1063	56,5	11,5	20	45	8,5	13,5	90	84	20	1,6	24	8	63	M8X30	DIN ISO 15552 / 21287
12021-08-1080	72	11,5	20	45	10,5	16,5	110	102	20	1,6	24	10	80	M10x32	DIN ISO 15552 / 21287

