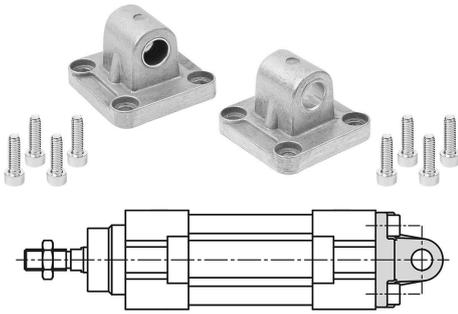


Item description/product images

**Description****Material:**

Hinge brackets aluminium.
Plain bearing sintered steel with Teflon.
Screws steel.

Version:

Hinge bracket bright.
Screws electro zinc-plated.

Note:

Swivel flange for DIN ISO 15552 and DIN ISO 21287 standard and compact cylinders.
This swivel flange is used for pivot mounting of pneumatic cylinders.

Mounted on the bottom (end cover).


Form A: Standard.

Form B: With sintered bronze plain bearing.

Supplied with:

1 swivel flange.
4 cap screws.

Drawings

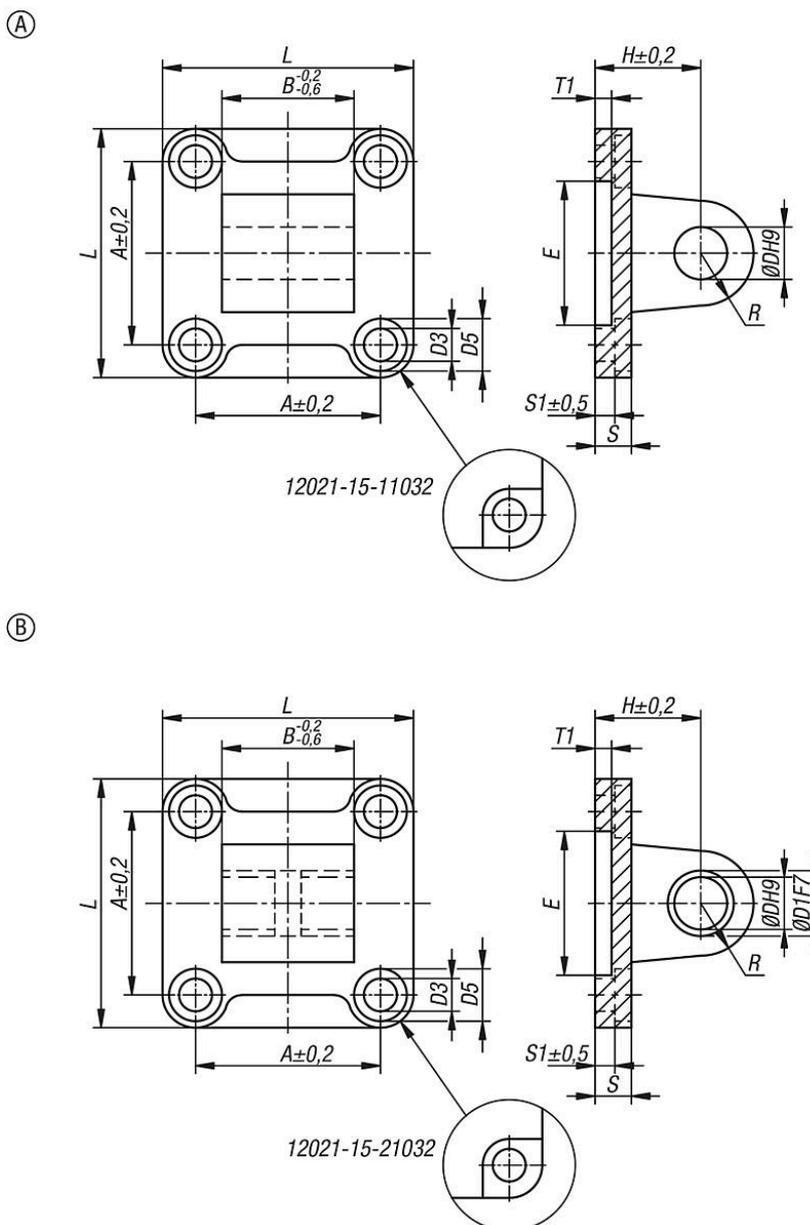

Overview of items

Swivel flanges for ISO 15552 / 21287

Order No.	Form	Form definition	Component material	A	B	D	D1	D3	D5	thickness	E	H
12021-15-11032	A	standard	-	32,5	26	10	-	6,6	11	9	30	22
12021-15-11040	A	standard	-	38	28	12	-	6,6	11	9	35	25
12021-15-11050	A	standard	-	46,5	32	12	-	9	15	11	40	27
12021-15-11063	A	standard	-	56,5	40	16	-	9	15	11	45	32
12021-15-11080	A	standard	-	72	50	16	-	11	18	14	45	36
12021-15-21032	B	Plain bearing	Sintered steel	32,5	26	10	12	6,6	11	9	30	22
12021-15-21040	B	Plain bearing	Sintered steel	38	28	12	14	6,6	11	9	35	25
12021-15-21050	B	Plain bearing	Sintered steel	46,5	32	12	14	9	15	11	40	27
12021-15-21063	B	Plain bearing	Sintered steel	56,5	40	16	18	9	15	11	45	32
12021-15-21080	B	Plain bearing	Sintered steel	72	50	16	18	11	18	14	45	36

Overview of items

Order No.	L	R	S1	T1	Cylinder Ø	Socket head screw DIN 912	Suitable for
12021-15-11032	45	10	5,5	5	32	M6X18	DIN ISO 15552 / 21287
12021-15-11040	52	12	5,5	5	40	M6X18	DIN ISO 15552 / 21287
12021-15-11050	65	12	6,5	5	50	M8X20	DIN ISO 15552 / 21287
12021-15-11063	75	16	6,5	5	63	M8X20	DIN ISO 15552 / 21287
12021-15-11080	95	16	10	5	80	M10x20	DIN ISO 15552 / 21287
12021-15-21032	45	10	5,5	5	32	M6X18	DIN ISO 15552 / 21287
12021-15-21040	52	12	5,5	5	40	M6X18	DIN ISO 15552 / 21287
12021-15-21050	65	12	6,5	5	50	M8X20	DIN ISO 15552 / 21287
12021-15-21063	75	16	6,5	5	63	M8X20	DIN ISO 15552 / 21287
12021-15-21080	95	16	10	5	80	M10x20	DIN ISO 15552 / 21287