Item description/product images



Description

Material:
Steel or A4 stainless steel (1.4571).

Version:
Electro zinc-plated steel.
Bright stainless steel.


Note:
DIN 3570 Form A round steel bracket, for the secure fastening of pipework to profile rails, brackets or steel structures.

These can be used as fixed points and as support points. When used as a support point, the nuts at the top and bottom must be tightened onto the component. The pipe should remain free to move to allow for thermal expansion.

Supplied with:
Round steel brackets are supplied without nuts.

Accessory:
07210 DIN 934 hexagon nuts.
07213 DIN 982 hexagon nuts with polyamide screw lock.
07214 DIN 985 hexagon nuts with polyamide screw lock.
07215 DIN 980 hexagon nuts with screw lock.
07216 Hexagon nuts with serrated flange.
07217 DIN 6923 / EN 1661 hexagon nuts with flange.
07300 DIN EN ISO 7089 A medium washers.

Drawings

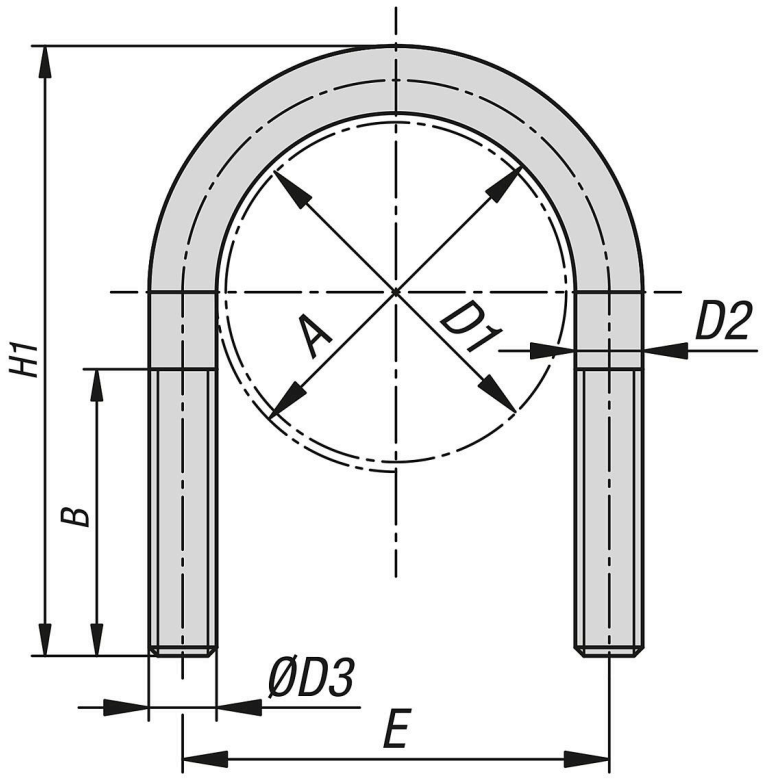

Overview of items

Round steel brackets, DIN 3570

Order No.	Form	Main material	Surface finish body	A	B	D1	D2	D3	E	H1	Tube nom. diameter (inch)	Tube nom. diameter (mm)
07860-1030	A	steel	electro zinc-plated	30	40	25-26,9	8,95	M10	40	70	3/4	20
07860-1038	A	steel	electro zinc-plated	38	40	30-33,7	8,95	M10	48	76	1	32
07860-1046	A	steel	electro zinc-plated	46	50	38-42,4	8,95	M10	56	86	1 1/4	40
07860-1052	A	steel	electro zinc-plated	52	50	44,5-48,3	8,95	M10	62	92	1 1/2	-
07860-1064	A	steel	electro zinc-plated	64	50	57-60,3	10,76	M12	76	109	2	50
07860-1082	A	steel	electro zinc-plated	82	50	76,1	10,76	M12	94	125	2 1/2	65
07860-1094	A	steel	electro zinc-plated	94	50	88,9	10,76	M12	106	138	3	80
07860-1120	A	steel	electro zinc-plated	120	60	108-114,3	14,6	M16	136	171	4	100
07860-1148	A	steel	electro zinc-plated	148	60	133-139,7	14,6	M16	164	191	5	125
07860-1176	A	steel	electro zinc-plated	176	60	159-168,3	14,6	M16	192	217	6	150
07860-1202	A	steel	electro zinc-plated	202	60	191-193,7	14,6	M16	218	249	7	175
07860-1228	A	steel	electro zinc-plated	228	70	216-219,1	18,25	M20	248	283	8	200
07860-1282	A	steel	electro zinc-plated	282	70	267-273	18,25	M20	302	334	10	250
07860-1332	A	steel	electro zinc-plated	332	70	318-323,9	18,25	M20	352	385	12	300
07860-1378	A	steel	electro zinc-plated	378	70	355,6-368	22	M24	402	435	14	350
07860-1428	A	steel	electro zinc-plated	428	70	406-419	22	M24	452	487	16	400
07860-1530	A	steel	electro zinc-plated	530	70	508-521	22	M24	554	589	20	500
07860-3030	A	stainless steel A4	bright	30	40	25-26,9	8,95	M10	40	70	3/4	20
07860-3038	A	stainless steel A4	bright	38	40	30-33,7	8,95	M10	48	76	1	32
07860-3046	A	stainless steel A4	bright	46	50	38-42,4	8,95	M10	56	86	1 1/4	40
07860-3052	A	stainless steel A4	bright	52	50	44,5-48,3	8,95	M10	62	92	1 1/2	-
07860-3064	A	stainless steel A4	bright	64	50	57-60,3	10,76	M12	76	109	2	50
07860-3082	A	stainless steel A4	bright	82	50	76,1	10,76	M12	94	125	2 1/2	65
07860-3094	A	stainless steel A4	bright	94	50	88,9	10,76	M12	106	138	3	80
07860-3120	A	stainless steel A4	bright	120	60	108-114,3	14,6	M16	136	171	4	100
07860-3148	A	stainless steel A4	bright	148	60	133-139,7	14,6	M16	164	191	5	125
07860-3176	A	stainless steel A4	bright	176	60	159-168,3	14,6	M16	192	217	6	150
07860-3202	A	stainless steel A4	bright	202	60	191-193,7	14,6	M16	218	249	7	175
07860-3228	A	stainless steel A4	bright	228	70	216-219,1	18,25	M20	248	283	8	200
07860-3282	A	stainless steel A4	bright	282	70	267-273	18,25	M20	302	334	10	250
07860-3332	A	stainless steel A4	bright	332	70	318-323,9	18,25	M20	352	385	12	300
07860-3378	A	stainless steel A4	bright	378	70	355,6-368	22	M24	402	435	14	350