Item description/product images



Description

Material:
Steel, brass or stainless steel.

Version:
Steel electro zinc-plated.
Brass nickel-plated.
Stainless steel bright.

Note:
Curb chains are mainly used prevent loss. They are used to reliably secure components, tools and equipment against accidental dropping or loss. They are ideal for making locks, pins or loose components captive, especially in industrial, craft and technical areas.


The curb chain comprises of interlinked, evenly shaped round wire links. Their design makes them ideal for retaining, securing and fastening purposes. However, they are not permitted for lifting or slinging loads.

Technical data:
The length is a nominal dimension with a tolerance of ±20 mm.

Assembly:
Curb chains are not classified and do not have a tested permissible load for lifting or slinging purposes. They are not graded. They are therefore not permitted for lifting loads or as hoist slings.

On request:
Other lengths in 1 metre increments. Minimum length 1 metre. Maximum length in one piece 25 metres.
Note: Chains that have been individually cut to length cannot be exchanged.

Drawings

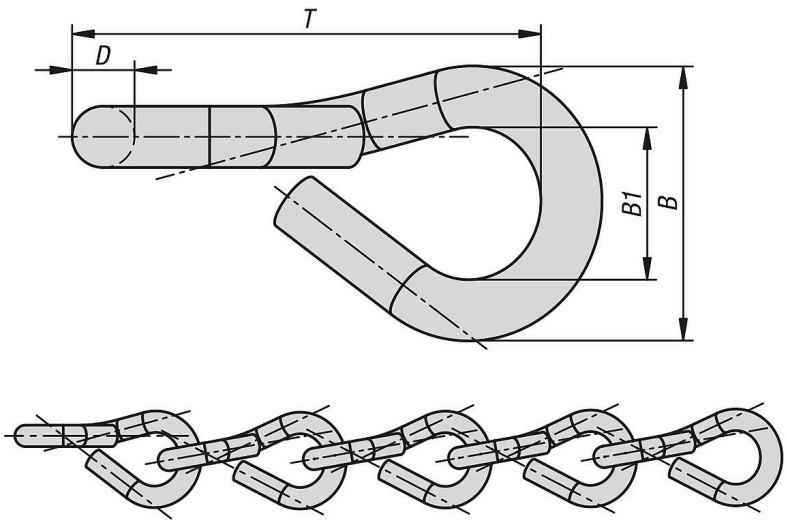

Overview of items

Overview of items

Curb chains

Order No.	Main material	Surface finish body	B	B1	D	Chain Length (m)	T (division)
96391-10-112080X1000	steel	electro zinc-plated	5,4	3	1,2	1	8
96391-10-112080X250	steel	electro zinc-plated	5,4	3	1,2	0,25	8
96391-10-112080X25000	steel	electro zinc-plated	5,4	3	1,2	-	8
96391-10-112080X500	steel	electro zinc-plated	5,4	3	1,2	-	8
96391-10-512080X1000	brass	nickel-plated	5,4	3	1,2	1	8
96391-10-512080X250	brass	nickel-plated	5,4	3	1,2	0,25	8
96391-10-512080X25000	brass	nickel-plated	5,4	3	1,2	-	8
96391-10-512080X500	brass	nickel-plated	5,4	3	1,2	-	8
96391-10-712080X1000	stainless steel	bright	5,4	3	1,2	5	8
96391-10-712080X250	stainless steel	bright	5,4	3	1,2	0,25	8
96391-10-712080X25000	stainless steel	bright	5,4	3	1,2	-	8
96391-10-712080X500	stainless steel	bright	5,4	3	1,2	-	8